
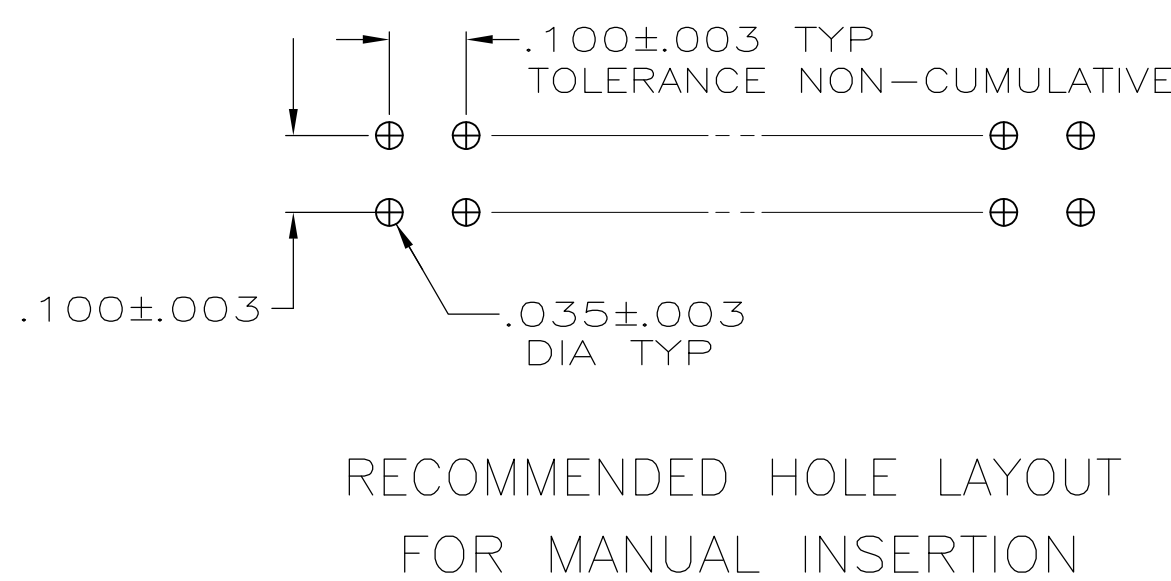


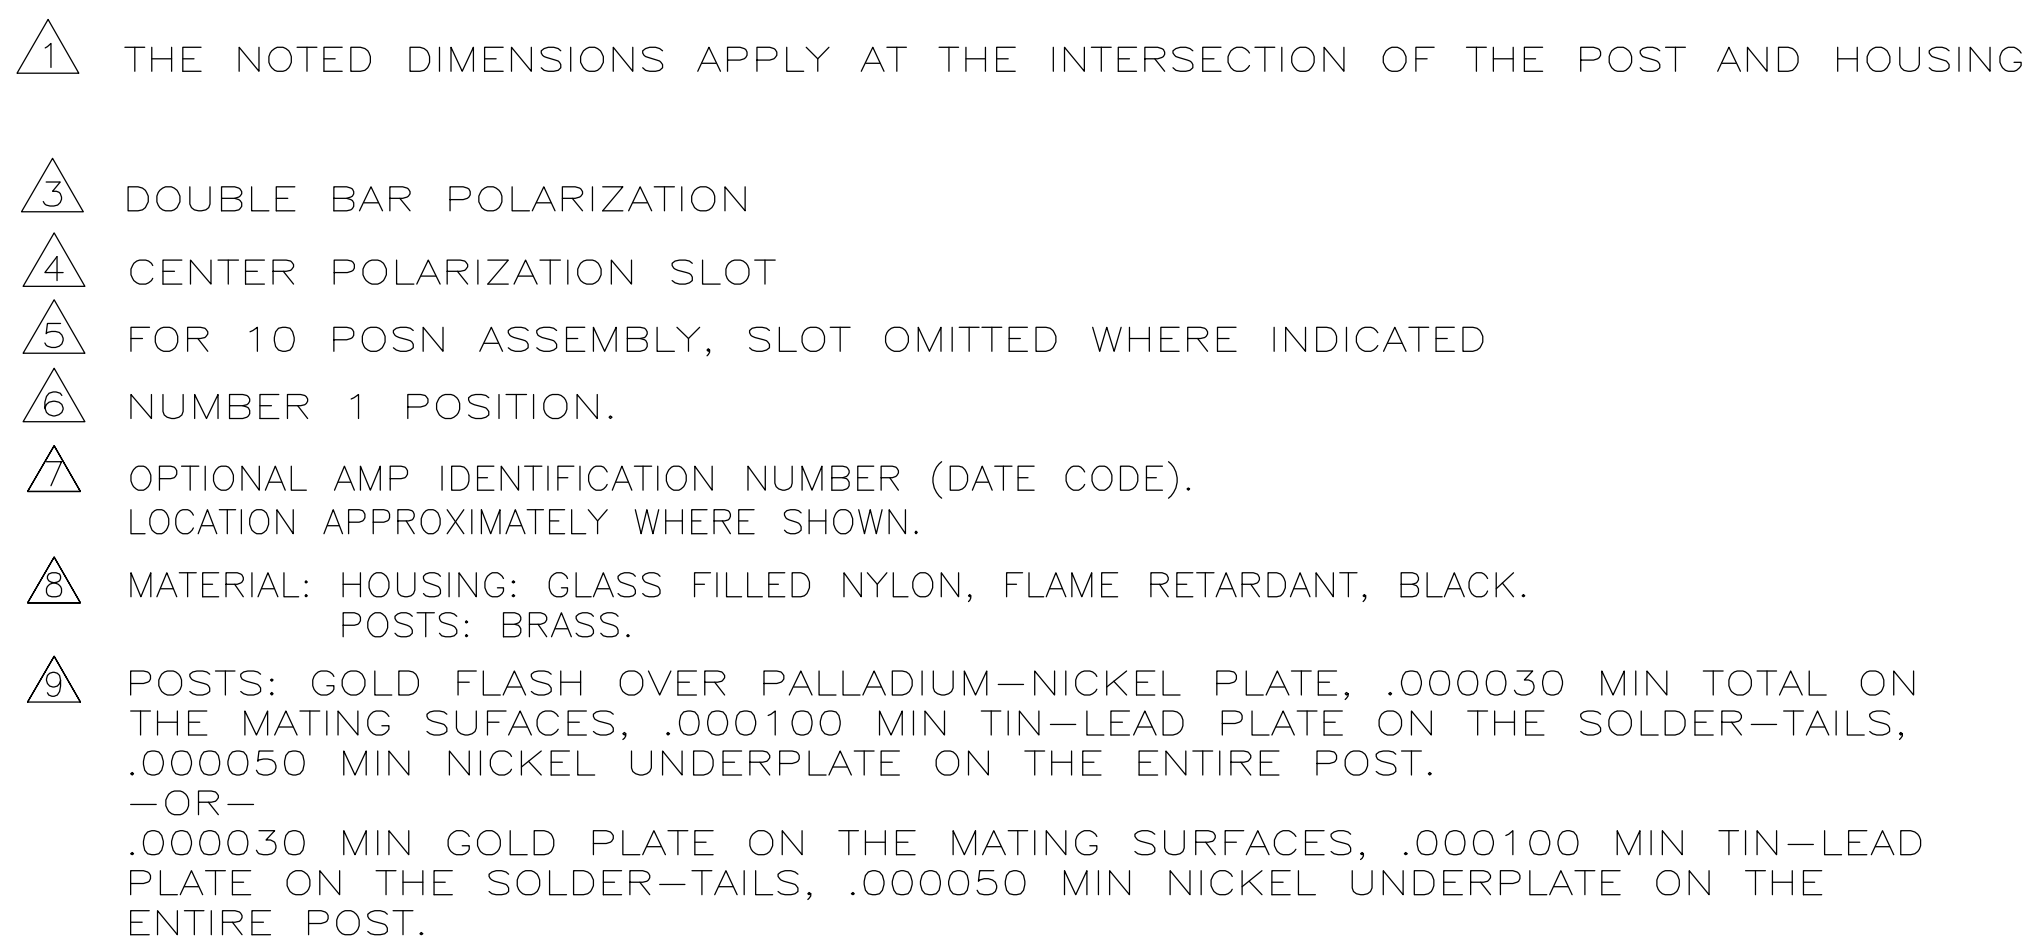

	1.800	1.400	14	30	1-104128-2
OBSELETE	1.500	1.100	11	24	1-104128-1
OBSELETE	3.300	2.900	29	60	1-104128-0
	2.800	2.400	24	50	104128-9
OBSELETE	2.500	2.100	21	44	104128-8
OBSELETE	2.300	1.900	19	40	104128-7
	2.000	1.600	16	34	104128-6
	1.600	1.200	12	26	104128-5
	1.300	.900	9	20	104128-4
	1.100	.700	7	16	104128-3
	1.000	.600	6	14	104128-2
	.800	.400	4	10	104128-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWG PIMOLL		TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CIR CLARK	03-10-87	NAME	HEADER ASSY. LOW PROFILE, AMP-LATCH		
		APD R. FLICKER		3-11-87					
		PRODUCT SPEC 108-40018							
		APPLICATION SPEC							
MATERIAL		0 PLC ± . 1 PLC ± . 2 PLC ± .005 3 PLC ± . 4 PLC ANGLES ± . FINISH		WEIGHT	—	SIZE A1	CAGE CODE 00779	DRAWING NO. C=104128	RESTRICTED TO —
CUSTOMER DRAWING				SCALE	4:1	SHEET	1 OF 1	REV	M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104128-1](#)