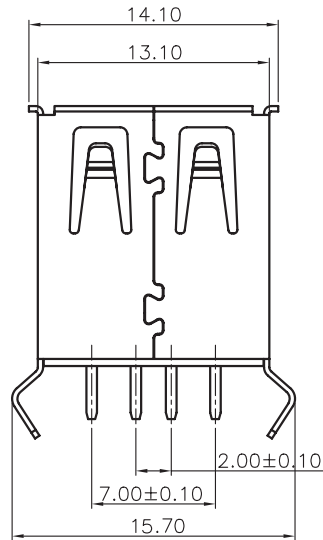
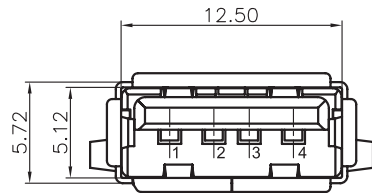


TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PBT
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOYS
 CONTACT TYPE: STAMPED
 CONTACT PLATING: SELECTIVE GOLD
 SHIELDING: BRASS Ni PLATED
 QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 FLAMABILITY RATING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1.5A Max
 WORKING VOLTAGE: 30V
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E323964 / MODEL NUMBER 614-x350

SOLDERING
 WAVE PROCESS ONLY

PACKAGING
 TRAY

RoHS Compliant				PROJECTION:	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15		DESCRIPTION: USB 2.0 TYPE A VERTICAL	SIZE A4
G	F	E	D					
C				APPROVAL: RJ	UNIT: MM		WERI PART NO: 614 004 135 023 1	
B					SCALE:			
A	08-JAN-14	PDF	QL		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW: QL			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Würth Electronics:](#)

[6140041350231](#)