



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WIRE RANGE AWG (mm ²)	REEL QUANTITY	DIN COLOR	STRIP LENGTH : 1/32" : 8.791	MAX. WIRE O.D.	DIM "L"	DIM "P"	OD-1	ID-1
FSD75-8-K	20 (0,50)	1000	WHITE	13/32 (10)	.09 (2,4)	.57 (14,5)	.31 (8,0)	.06 (1,4)	.04 (1,1)
FSD76-8-K	18 (0,75)	1000	GRAY	13/32 (10)	.10 (2,6)	.57 (14,5)	.31 (8,0)	.06 (1,6)	.05 (1,3)
FSD77-8-K	18 (1,0)	1000	RED	13/32 (10)	.11 (2,8)	.57 (14,5)	.31 (8,0)	.07 (1,8)	.06 (1,5)
FSD78-8-K	16 (1,5)	1000	BLACK	13/32 (10)	.13 (3,2)	.57 (14,5)	.31 (8,0)	.08 (2,1)	.07 (1,8)
FSD80-8-DK	14 (2,5)	500	BLUE	13/32 (10)	.15 (3,9)	.57 (14,5)	.31 (8,0)	.10 (2,6)	.09 (2,3)

NOTES:

- MATERIAL:
 - A. STAMPING - COPPER, TIN PLATED
 - B. HOUSING - POLYPROPYLENE, DIN COLOR CODED
- DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- FOR TOLERANCING REFER TO DIN 46228 PART 4
- PACKAGE QTY.: 1000 PC. SPOOL, 500 PC. SPOOL (FSD-80-8 only)
- INSTALLATION TOOL: CA-10
CP-881

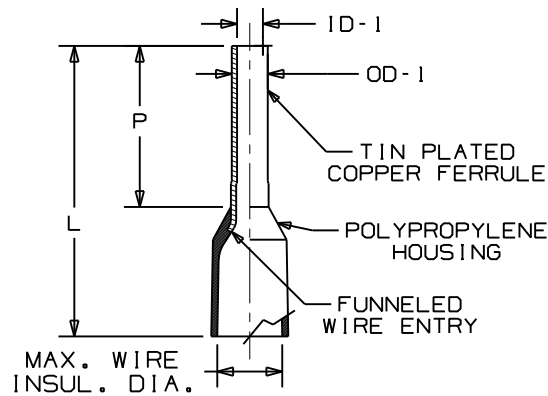

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02	03/11	BDK	LCA	VMB	REMOVED FSD73-8-K AND FSD74-8-K. ADDED DIN TO COLOR. REVISED MAX. WIRE CHART. ADDED PART 4 TO DIN 46228.	A41755
01	02/11	SRB			CORRECTED PART NUMBERS	
00	01/11	SRB			RELEASED	

TITLE		INSULATED FERRULES ON MINI REEL	
CONTROL DRAWING			
ITEM REVISION NAME		N41755BA/02.PRT	
DATASET FILE NAME		N41755BA/02.PRT	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x : .xxx : .xx : ANGLES :		N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER:	
A41755		SHT 1 OF 1	
DRAWN BY	DATE	CHK	SCALE
SRB	01/11		NTS
SIZE	A		

D101000A/11

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[FSD78-8-K](#) [FSD75-8-K](#) [FSD76-8-K](#)